

# DUPLEX

## 500 to 9000 MultiEco

All-purpose ventilation units  
with counterflow  
heat exchangers

DUPLEX 500–9000 MultiEco is a new generation of all-purpose ventilation units with counterflow heat recovery exchangers. The indoor version of compact DUPLEX 500–9000 MultiEco units are used for comfort ventilation, hot-air heating and cooling in small facilities, shop floors, stores, schools, restaurants, shops, sports and industrial halls. They are suitable wherever efficient ventilation and possibly hot-air circulation ventilation and cooling must be provided at minimum running cost, i.e. the highest efficiency of heat recovery, low power input of fans and as little noise as possible.

DUPLEX MultiEco units are produced in compact (500 to 6500 MultiEco) and semi-compact (7500 to 9000 MultiEco) version and contain two independently controlled EC fans with backward curved blades, a heat recovery exchanger with large heat-transfer surface and high efficiency, slide-out supply and exhaust air class G4, M5 or F7 filters, drain pans and possibly also an a circulation damper with a servo drive or integrated air heaters and coolers.

Unit casing is divided into two versions:

DUPLEX 500–6500 MultiEco are frameless construction, casing is made of painted metal sheet (colour RAL 9006) with 30 mm PIR insulation with heat transfer coefficient ( $\lambda = 0,024 \text{ W/mK}$ ).

DUPLEX 7500–9000 MultiEco are frame construction, casing is made of painted metal sheet (colour RAL 9006) with 45 mm mineral wool insulation with heat transfer coefficient ( $\lambda = 0,037 \text{ W/mK}$ ).

### DUPLEX MultiEco ventilation units meet the requirements of the most stringent European standards:

- Casing properties according to EN 1886
- EC motors according to ErP 2015
- SFP < 0,45 W/(m<sup>3</sup>/h) according to PassivHaus\*
- Hygienic requests according to VDI6022
- Commission regulation (EU) requirements No. 1253/2014 (Ecodesign)\*



### Advantages of DUPLEX MultiEco units:

- New design of ventilation units with excellent parameters
- Great thermal insulation of the casing (class T2)
- Reduced thermal bridging (class TB1/TB2\*\*)
- Compact dimensions
- Very flat unit suitable for ceiling-suspended installation
- Ease of installation
- Variable configuration of discharge ports
- Unified dimensions of ports
- Optional versions with a bypass and circulation damper
- Horizontal floor-standing up to 9 000 m<sup>3</sup>/h, ceiling-suspended types up to 6 500 m<sup>3</sup>/h and floor-standing flat types up to 5 500 m<sup>3</sup>/h
- High efficiency fans – SFP < 0,45 W/(m<sup>3</sup>/h)\*
- High heat recovery efficiency of the counterflow heat exchanger – up to 93 %
- Integrated control system including temperature sensors
- Integrated web server (aMotion regulation)
- Comprehensive design software

\* in the defined working area  
\*\* TB1 for 500–6500 MultiEco  
TB2 for 7500–9000 MultiEco






500 to 9000 MultiEco

### AVAILABLE MODIFICATIONS (CAN BE COMBINED)

- |     |                                  |       |                                   |
|-----|----------------------------------|-------|-----------------------------------|
| - B | with in-built bypass damper      | - T   | with in-built hot-water heater    |
| - C | with in-built circulation damper | - CHF | with in-built direct chiller      |
| - E | with in-built electrical heater  | - CHW | with in-built water-based chiller |

### OPERATING MODES OF DUPLEX MULTIECO UNITS

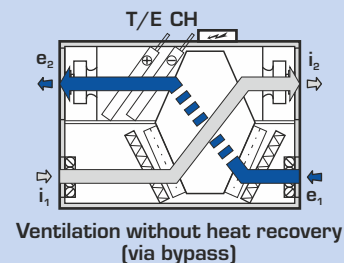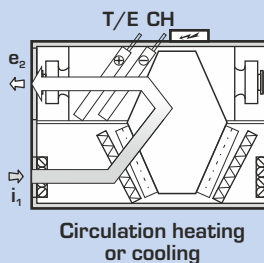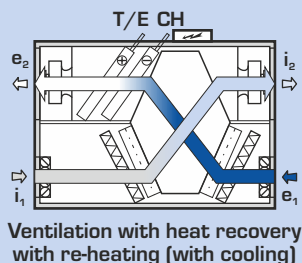

➔ e<sub>1</sub> ... Fresh outdoor air suction  
⇄ e<sub>2</sub> ... Fresh filtered air outlet

⇄ i<sub>1</sub> ... Exhaust air suction  
⇄ i<sub>2</sub> ... Exhaust air outlet

T/E... Central heating / electrical heater connection  
CH ... Cooling connection

### SELECTION SOFTWARE



For the detailed design of DUPLEX series units, accessories and control systems we recommend using our selection software. You can find it on our website at [www.atrea.eu](http://www.atrea.eu).



VENTILATION UNITS WITH HEAT RECOVERY

ATREA s.r.o., Čs. armády 32  
466 05 Jablonec n. Nisou  
Česká republika



Tel.: +420 483 368 133

Fax: +420 483 368 112

E-mail: [atrea@atrea.eu](mailto:atrea@atrea.eu)

[www.atrea.eu](http://www.atrea.eu)

# PERFORMANCE GRAPHS

## DUPLEX MULTI ECO

DUPLEX MultiEco		500	800	1100	1500	2500	3500	4500	5500	6500	7500	9000	
Supply air - max. <sup>1)</sup>	m <sup>3</sup> /h	660	1 200	1 300	2 200	3 600	5 500	5 800	7 500	7 800	8 600	11 500	
Extraction air - max. <sup>1)</sup>	m <sup>3</sup> /h	670	1 150	1 250	1 800	3 550	5 300	5 600	7 100	7 700	8 300	11 300	
Max. airflow according to ErP 2018 <sup>5)</sup>	m <sup>3</sup> /h	550	850	950	1 600	2 350	3 550	4 250	5 000	6 000	7 200	8 100	
Heat recovery efficiency <sup>2)</sup>	%	up to 93 %											
Number of versions and positions	-	see table „Mounting positions“, page 4											
Weight <sup>3)</sup>	kg	80-110	95-130	120-170	200-280	290-370	350-430	370-450	480-560	580-670	1120-1250	1210-1350	
Max. power input	kW	0,3	0,7	0,8	1,2	2,6	4,5	5,2	6,6	6,6	6,6	8,9	
Voltage	V	230						400					
Frequency	Hz	50											
Revolutions - max.	min <sup>-1</sup>	4 300	3 350	3 350	2 920	3 000	2 980	2 980	2 700	2 700	2 700	2 570	
Heating output E low - max. <sup>5)</sup>	kW	1,8	1,8	1,8	2,1	4,2	7,2	7,2	9,9	9,9	-	-	
Heating output E high - max. <sup>5)</sup>	kW	-	-	-	4,2	8,4	10,8	12,6	14,7	14,7	-	-	
Heating output T - max. <sup>4)</sup>	kW	5	14	16	22	30	42	51	71	80	85	90	
Cooling output CHW - max. <sup>4)</sup>	kW	4	8	10	16	22	30	42	56	62	67	72	
Cooling output CHF - max. <sup>4)</sup>	kW	3	6	8	10	13	25	37	41	50	55	60	

<sup>1)</sup> Maximum flow rate through units at zero external pressure


<sup>2)</sup> According to air volume

<sup>3)</sup> Depending on equipment


<sup>4)</sup> Depending on register type, liquid and flow rates

<sup>5)</sup> For detailed information please use our DUPLEX selection software.


## PERFORMANCE SUMMARY

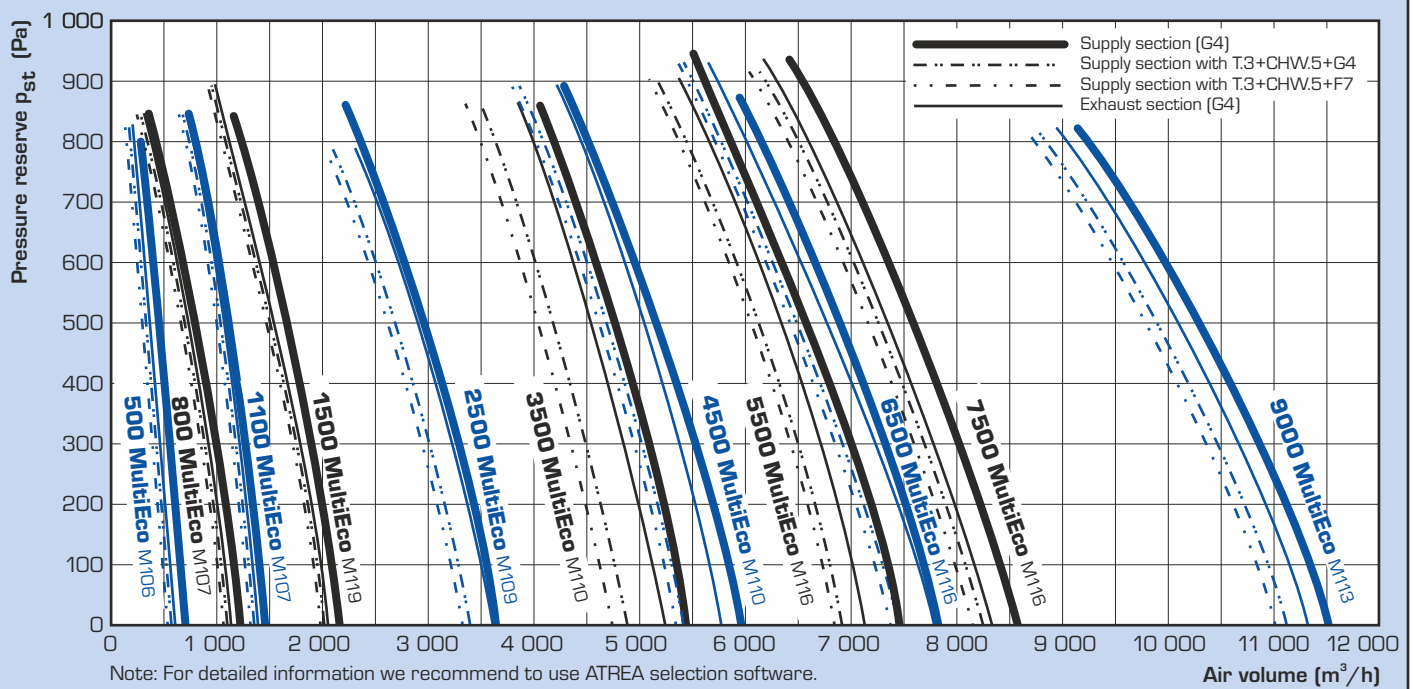

## HEAT RECOVERY EFFICIENCY

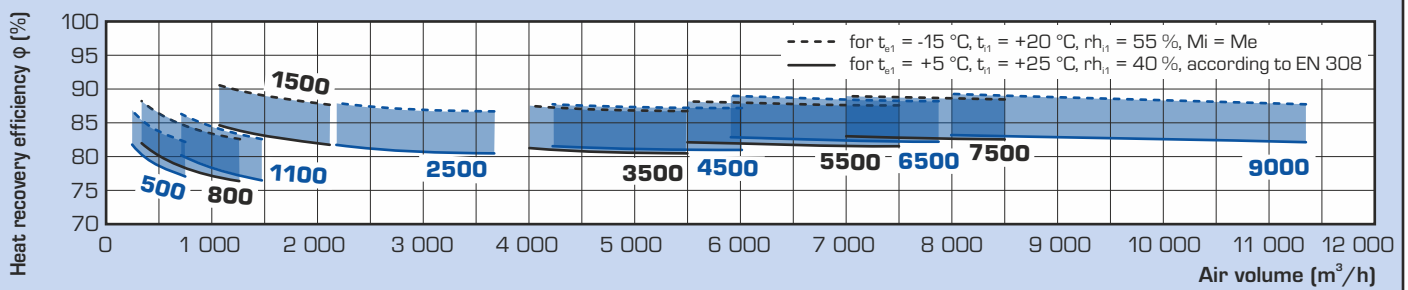


## HEATING AND COOLING PERFORMANCES

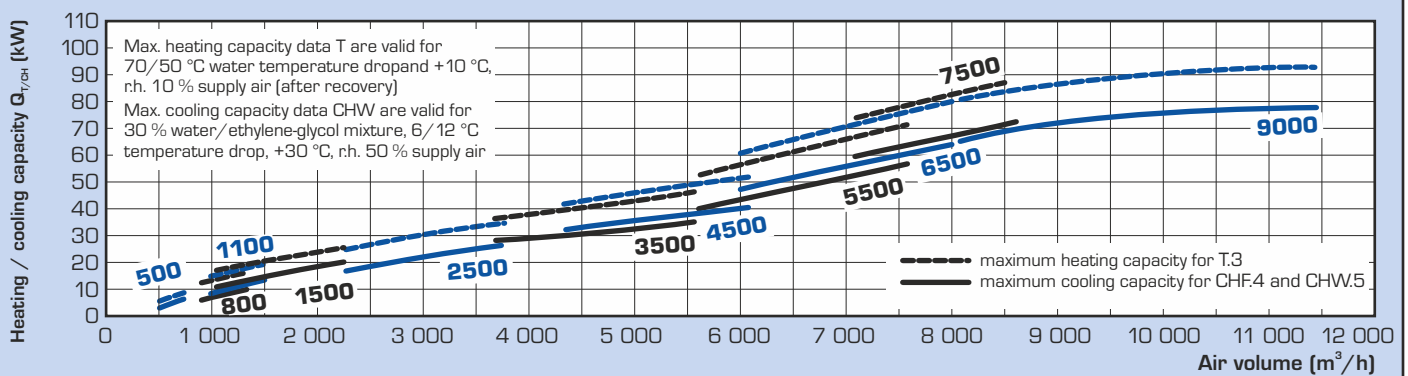


## BASIC DIMENSIONS

### FLOOR-STANDING (front view) MultiEco 500 to 6500

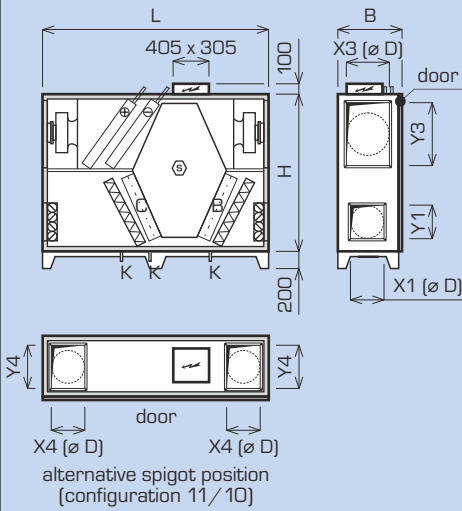


### MultiEco 7500 to 9000

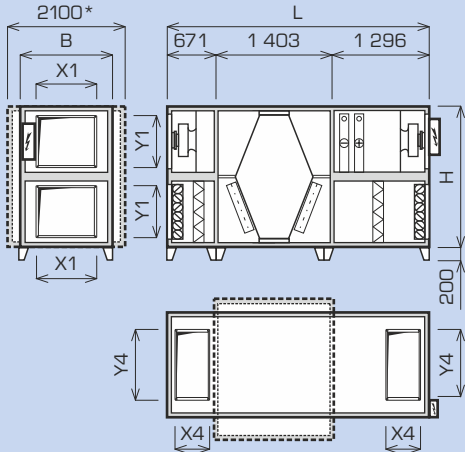


\* dimension only for DUPLEX 9000 MultiEco


### CEILING-SUSPENDED (top view) MultiEco 500 to 6500

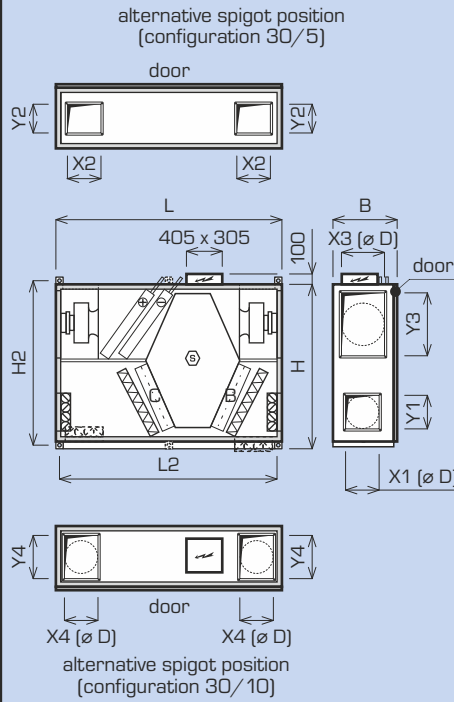

### MultiEco 6500

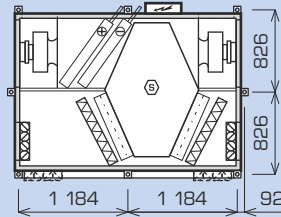

### FLOOR-STANDING FLAT (top view) MultiEco 1500 to 5500

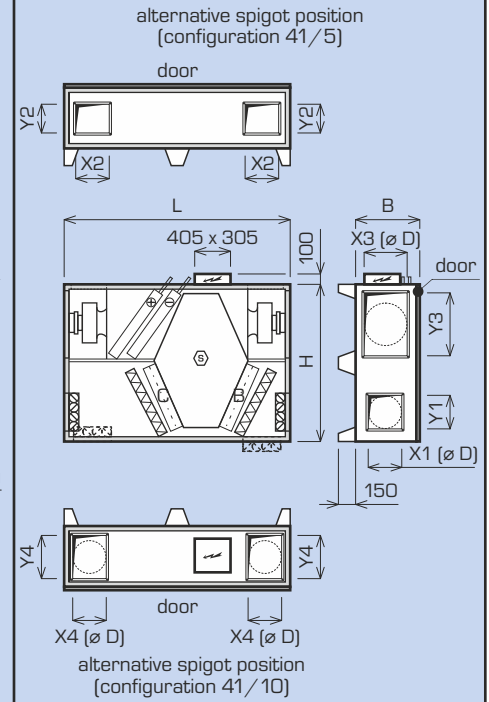


DUPLEX MultiEco		500	800	1100	1500	2500	3500	4500	5500	6500	7500	9000
dimension H	mm	765	970	1 100	1 600	1 600	1 600	1 600	1 600	1 600	1 795	1 795
dimension H2	mm	715	920	1 050	1 650	1 650	1 650	1 650	1 650	-	-	-
dimension B	mm	384	384	384	455	580	775	885	1 065	1 295/1 390*	1 620	1 620
length L	mm	1 600	1 800	1 920	2 300	2 300	2 300	2 500	2 500	2 500	3 370	3 370
length L2	mm	1 652	1 852	1 972	2 270	2 270	2 270	2 470	2 470	see diagram	-	-
condensate drain	mm	ø 22			ø 32							
<b>Connecting ports</b>												
dimension X1 × Y1 (standard e <sub>1</sub> , i <sub>1</sub> ), D	mm	ø 200	ø 250	ø 250	ø 315	300 × 400	400 × 400	500 × 500	500 × 500	700 × 500	900 × 710	900 × 710
dimension X2 × Y2 (atyp e <sub>1</sub> , i <sub>1</sub> ), D	mm	ø 200	ø 250	ø 250	400 × 200	300 × 400	400 × 400	500 × 500	500 × 500	500 × 700	-	-
dimension X3 × Y3 (standard e <sub>2</sub> , i <sub>2</sub> )	mm	200 × 250	200 × 350	200 × 350	ø 315	450 × 710	500 × 710	710 × 710	900 × 710	900 × 710	-	-
dimension X4 × Y4 (atyp e <sub>2</sub> , i <sub>2</sub> )	mm	-	-	-	-	250 × 355	250 × 400	355 × 630	355 × 800	355 × 900	400 × 1200	400 × 1200


\* For DUPLEX 6500 MultiEco in configuration 30/x. For detailed information please use our ATREA selection software.

## TYPES AND DIMENSIONS OF CONNECTING PORTS


**CIRCULAR**




**Basic port**  
(inlet, outlet)




**Port with flexible flange**  
(inlet, outlet)








**Port with damper**  
(inlet, outlet)



**Port with damper and flexible flange**  
(inlet only)



**RECTANGULAR**



# INSTALLATION AND VERSIONS

## INSTALLATION VERSIONS AND CONNECTING PORTS


DUPLEX 500 to 9000 MultiEco units are available in a range of versions to facilitate their installation in the machine room. This significantly increases options to install DUPLEX MultiEco units in cramped spaces. For structural reasons and to ensure condensate drain it is not possible to have all units available in all mounting positions. Detailed drawings are shown in the summary table "Mounting positions".

DUPLEX MultiEco units are characterised by a wide range of accessories – the ports may be optionally fitted with flexible flanges and inlet ports may have shut-off dampers if required.



## MOUNTING POSITIONS

### FLOOR-STANDING HORIZONTAL POSITION

MultiEco 500 to 9000

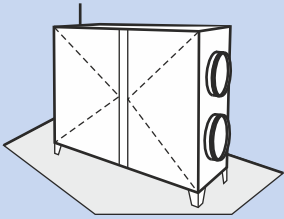


configuration 10/0 to 11/10 – door-side view (up to 8 configurations in total)

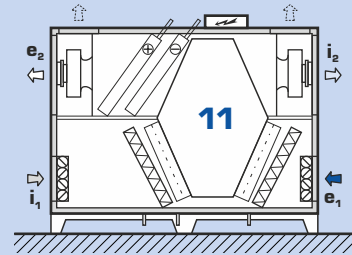
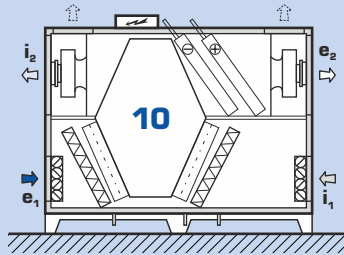


### CEILING-SUSPENDED POSITION

MultiEco 500 to 6500

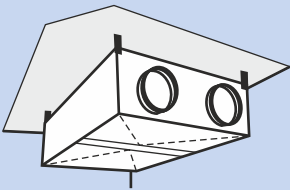


configuration 30/0 to 31/15 – top view (up to 32 configurations in total)

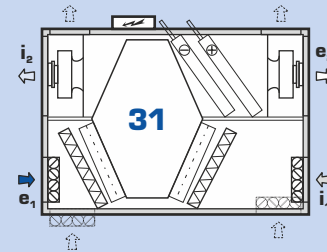
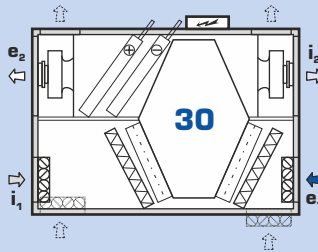


### FLOOR-STANDING FLAT POSITION

MultiEco 1500 to 5500

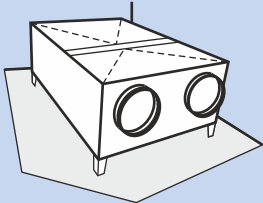

configuration 40/0 to 41/15 – top view (up to 32 configurations in total)

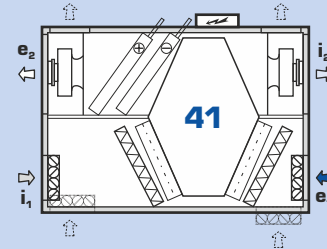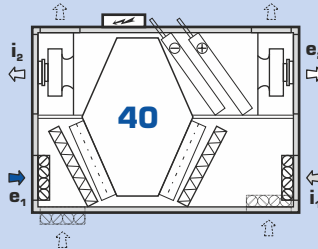

500, 800 and 1100 MultiEco units are available in following configurations:


- horizontal: 10/0, 11/0
- ceiling-suspended: 30/0, 30/1, 30/4, 30/5, 31/0, 31/1, 31/4, 31/5

For more detailed technical information check out ATREA selection software.

## OTHER CONFIGURATIONS OF DUPLEX MULTI


### UPRIGHT POSITION

DUPLEX MultiEco-V 1500 to 6500

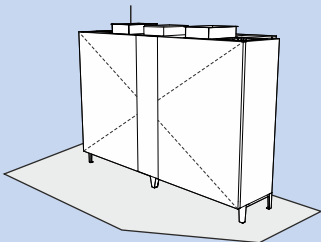

### ROOFTOP UNITS - FLAT

DUPLEX MultiEco-N 1500 to 9000

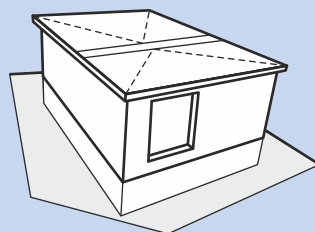

For detailed information please see separate technical catalogues.

## HANDLING SPACE


DUPLEX units must be installed with the prescribed handling space around the unit in mind.

Below the unit at least 150 mm must be left to install the DN 32 condensate drain line. This line must run through a U-bend at least 150 mm high into a sewer. This space is easily provided when the steel supporting feet supplied as standard are used. Handling space in front of the unit must be maintained for opening the front door; replacing filters and providing servicing and installation access to each unit part. Each drawing shows the minimum handling space.




In addition, each unit must have the minimum handling space of 600 mm from the side of the control system electric switchboard according to CSN. Units with a heating or cooling control manifold must have free space from the side of the manifold, too.

### Handling space in front of the door


#### Floor-standing horizontal 500-6500 MultiEco

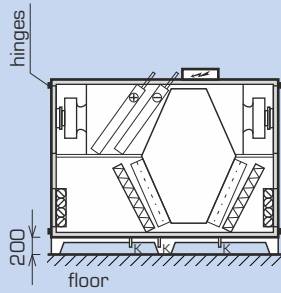


#### Floor-standing horizontal 7500-9000 MultiEco

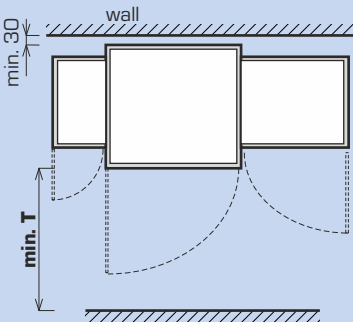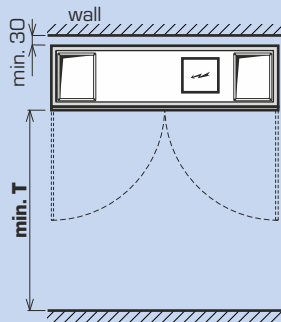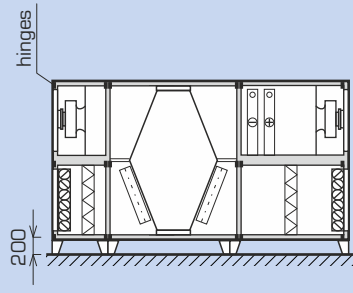

#### Floor-standing flat 1500-5500 MultiEco

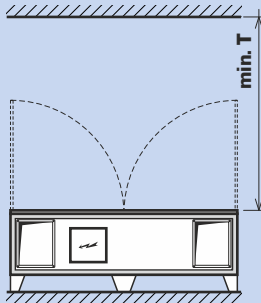


#### Ceiling-suspended 500-6500 MultiEco

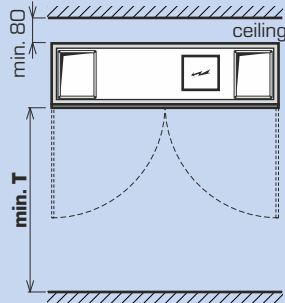


### Handling space for accessories

#### Control modules

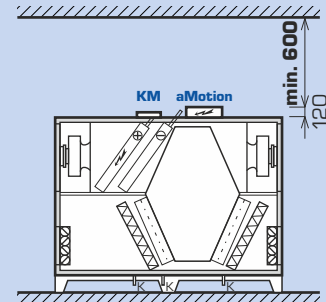

#### Control manifolds for coils

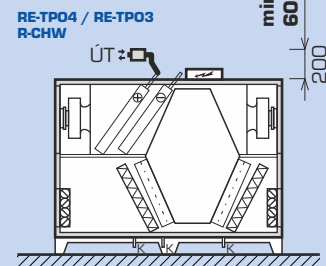

Type	standard door T (mm)	hingeless door T (mm)
DUPLEX 500 MultiEco	800	500
DUPLEX 800 MultiEco	900	500
DUPLEX 1100 MultiEco	1 000	500
DUPLEX 1500 MultiEco	1 200	500
DUPLEX 2500 MultiEco	1 200	600
DUPLEX 3500 MultiEco	1 200	680
DUPLEX 4500 MultiEco	1 150	900
DUPLEX 5500 MultiEco	1 150	1 100
DUPLEX 6500 MultiEco	1 320	1 300
DUPLEX 7500 MultiEco	-	1 600
DUPLEX 9000 MultiEco	-	1 600

## ACOUSTIC POWER $L_w$ AND ACOUSTIC PRESSURE $L_{D,3}$

Type	Working point	Acoustic power $L_w$ [dB(A)]					Acoustic pressure $L_{D,3}$ [dB(A)] at distance of 3 m
		inlet $e_1$	inlet $i_1$	outlet $e_2$	outlet $i_2$	unit	
DUPLEX 500 MultiEco	500 m <sup>3</sup> /h (200 Pa)	53	66	80	82	59	38
DUPLEX 800 MultiEco	800 m <sup>3</sup> /h (200 Pa)	64	65	81	79	58	38
DUPLEX 1100 MultiEco	1 000 m <sup>3</sup> /h (200 Pa)	56	58	80	80	65	44
DUPLEX 1500 MultiEco	1 500 m <sup>3</sup> /h (200 Pa)	61	61	86	86	64	43
DUPLEX 2500 MultiEco	2 500 m <sup>3</sup> /h (200 Pa)	59	55	79	79	70	49
DUPLEX 3500 MultiEco	3 500 m <sup>3</sup> /h (200 Pa)	64	62	90	90	70	50
DUPLEX 4500 MultiEco	4 500 m <sup>3</sup> /h (200 Pa)	67	67	92	91	76	55
DUPLEX 5500 MultiEco	5 500 m <sup>3</sup> /h (200 Pa)	69	68	97	95	66	45
DUPLEX 6500 MultiEco	6 000 m <sup>3</sup> /h (200 Pa)	72	72	96	88	75	55
DUPLEX 7500 MultiEco	7 500 m <sup>3</sup> /h (200 Pa)	65	69	91	92	72	51
DUPLEX 9000 MultiEco	8 500 m <sup>3</sup> /h (200 Pa)	67	66	97	97	76	46

# MODIFICATIONS

## DUPLEX MULTIECO - BASIC UNIT



### Basic configuration

#### DUPLEX 500-6500 MultiEco

The compact unit consists of supply and exhaust free-wheel fans with electric motors in anti-vibration mounting, removable counterflow air-to-air heat recovery core assembled from thin plastic plates, removable G4, M5 or F7 supply and exhaust air filters, and a condensate pan with flexible hose. A front door enables easy access to all built-in components and filters.

#### DUPLEX 7500-9000 MultiEco

The unit consists of 3 separate sections:

- 1 - supply free-wheel fan with electric motors in anti-vibration mounting, removable supply filter G4, M5 or F7
- 2 - cross-flow heat recovery exchanger with an electric motor, a belt pulley and a belt
- 3 - exhaust free-wheel fan with electric motors in anti-vibration mounting, removable exhaust filter G4, M5 or F7

A front door enables easy access to all built-in components and filters.

The units meet requirement in accordance with Commission regulation (EU) No. 1253/2014 (Ecodesign) in the defined working area

DUPLEX xxxx MultiEco

Me.xxx; Mi.xxx



### Fans

All units are equipped with high-efficiency fans (ebm-papst and Ziehl Abegg) with free-running impellers and backward curved blades. Ventilators of DUPLEX 500 to 9000 MultiEco units meets the requirements of the ErP 2015.




### Heat recovery exchanger

The only heat recovery core type S7 or S3 made of plastic in counterflow arrangement with high efficiency - up to 93 %.

Sx


## DUPLEX MULTIECO - MODIFICATION DESCRIPTION



### By-pass ("B")

By-pass of the plate heat recovery core on supply air side. By-pass consists of an opposed-blade damper and an actuator. It is fitted next to the recovery core inside the unit; it does not increase size of the unit. The standard actuator is BELIMO 24 V; other types are available upon request.

B.x



### Mixing damper ("C")

The mixing damper is used to mix exhaust and supply air. Circulation valve consists of an opposed-blade damper and actuator. It is fitted next to the recovery core inside the unit, it does not increase the size of the unit. The standard actuator is BELIMO 24 V; other types are available upon request.


C.x



### Hot water heating coil ("T")

Built-in water-to-air three-row (possibly five-row) heating coil; made of copper pipes and aluminum fins. Designed for systems up to 110 °C and 1,0 MPa. The coil is standardly equipped with flexible connection and a steam-gas capillary thermostat for freeze protection. Units in modification T (with heating coil) must be equipped with e, supply air shutoff damper; an actuator with spring-return function is recommended. A coil hydraulic kit for heating capacity control of RE-TPO4 or RE-TPO3 type can be supplied with the coil upon request.

T.x



### Electric heating coil ("E")

Integrated electric heating coils consist of PTC (Positive Temperature Coefficient) cells; they are generally used to heat up supply air. By default, electric heating coils always include protective thermostats (operational as well as emergency with manual reset) and regulation module KM featuring power switching elements with so called "zero" switching function (SSR). Built-in electric heating coils are offered in the 500-6500 MultiEco units in two power options (basic and powerful). For more information please refer to the selection software DUPLEX.

E.x



### Direct expansion (DX) coil ("CHF")

A built-in coil made of copper pipes and aluminum fins, including a condensate pan with individual condensate drainage and a pressure switch for freeze alarm. Three- or four-row coils with various evaporate temperature are chosen depending on capacity required, refrigerant type and air parameters. Optionally it is possible to deliver double-circuit evaporator in division 1:1 or 1:2, or completely atypical with needed capacity.

CHF.x



### Chilled water cooling coil ("CHW")

A built-in coil made of copper pipes and aluminum fins, including a condensate pan with individual condensate drainage. Three- or five-row coils are chosen depending on capacity required, cooling medium type and air parameters. The cooling coil can be equipped with the R-CHW2 or R-CHW3 hydraulic kit on request.

CHW.x


## OTHER OPTIONAL ACCESSORIES (BASIC OVERVIEW)

Ke.xxx; Ki.xxx

### Shutoff damper e<sub>1</sub>; i<sub>1</sub>

Shutoff dampers standardly fitted with BELIMO actuators are located in the air inlet port. The following damper types are available:


- **fresh air damper e<sub>1</sub>** - mandatory for C modification (with mixing damper) and T modification (with heating coil)
- **exhaust air damper i<sub>1</sub>**



Fe.xxx; Fi.xxx

### Air filtration

All DUPLEX MultiEco units can be equipped with supply or exhaust air filtration of M5 or F7 class instead of standard G4 class. Pressure drop of the filter is then 50 to 100 Pa (clean filter) depending on air flow rate, unit type and dirt accumulated.



RE-TPO.x

### Heating coil hydraulic kit

Its function is to control heating capacity of a heating coil. It consists of a three-speed pump, two globe shutoff valves and connection pipes. Further equipment depends on the type:

- **RE-TPO4** - four-way mixing valve with an actuator for digital control system
- **RE-TPO3** - three-way mixing valve with an actuator for digital control system



R-CHW.x

### Cooling coil hydraulic kit

Its function is to control cooling capacity of a chilled-water cooling coil. It always consists of two globe shutoff valves and connection pipes. Further equipment depends on the type:


- **R-CHW3** - three-way mixing valve with an actuator
- **R-CHW2** - throttling valve with an actuator for digital control system



MFF

### Tube manometers

Accessory for filters for simple view of current pressure drop. The tube manometers are obligatory for hygienic unit design in accordance with the VDI 6022.



FK.x

### Spare cartridge filters

Replacement filter cartridges in different sizes based on the unit type. Available in G4, M5 and F7 filtration class.



### Delivery of disassembled unit

All units can be delivered dismantled on request. The unit is to be assembled by rivets and bolts directly on site, therefore the unit can be installed in inaccessible location. Casing insulation class T3, thermal bridging class TB2.

H.P

### Flexible connections

Round and rectangular ports can be equipped with flexible connections upon request.



TPO

### Hot water heating coil (TPO)

Separately supplied coil for installation into round duct. It is suitable for cramped locations, where it is impossible to put the coil inside the unit, as well as for rooftop units. The coil is standardly equipped with the steam-gas capillary thermostat. Capacities and diameters can be found in respective catalogue sheets.



### Electric heating coil (EPO-V)

Separately supplied heating coil to be fitted into round or rectangular duct. Capacities and diameters can be found in respective catalogue sheets.



CF.XXX

### Constant air flow and pressure

Manometers reading fan pressure together with controls, enables intelligent fan control of preselected airflow. This accessory assumes the unit is equipped with ATREA digital control system. Using a second manometer (optional accessory) in the supply air duct enables the user to control constant pressure in the supply duct.



EPO-V

### Electric preheaters EPO-V


EPO-V electric heating coils to provide the antifreeze protection of the heat recovery exchanger when equal-pressure ventilation is continuously required. It is installed inside a duct on the outdoor supply air side of the unit (e<sub>1</sub>).

This accessory assumes the unit is equipped with ATREA digital control system.




### Hingeless door

When needed it is possible to deliver door without standard hinges - than necessary manipulation space is reduced. DUPLEX 7500 and 9000 MultiEco are supplied hingeless standardly.



### External switchboard

It is possible to supply control module in external version with various cable length.



# CONTROLS






DUPLEX MultiEco units are delivered with basic control components or with complete control systems.

There are three types of control systems available (Basic, CPM and aMotion) according to customer needs and an application. The systems also include variety of sensors (temperature, humidity, air quality, CO<sub>2</sub>) for effective operation control.

## Features of the control systems

- selection of the most suitable and efficient control system at the lowest cost, depending on the particular application
- control system is integrated with the unit, most components are already wired and checked in factory, thus reducing the risk of incorrect wiring
- no control system project documentation is necessary for standard cases, standardized solutions can be used
- simple wiring, system simplicity, error indication
- qualified technical support and consulting

## SUMMARY OF DUPLEX MULTIECO CONTROL SYSTEMS

Type	Use	Controller
<b>"Basic" controls</b>	<ul style="list-style-type: none"> <li>- all electrical components are wired to a junction box terminal strip inside or outside the unit</li> <li>- standard components are fans, damper actuators, capillary freeze protection thermostat of hot water heating coil</li> <li>- more components are included upon customer's request (exact actuator type, sensors, thermostats, pressure switches etc.)</li> <li>- suitable for applications with separate delivery of control system; e.g. large buildings with central control system etc.</li> </ul>	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <p><b>basic version</b> (fans, actuators, thermostats, pressure switches and others on request)</p> </div> <p style="text-align: center;">↑ ↓</p> <div style="border: 1px solid black; padding: 5px; text-align: center;"> <p>Supervisory control system</p> </div>
<b>"CPM" controls</b>	<p><b>Standard functions</b></p> <ul style="list-style-type: none"> <li>- EC fan speed control (stepless)</li> <li>- automatic by-pass damper position</li> <li>- frost protection of heat exchanger</li> <li>- switching of electric or water heater</li> <li>- input for external switch</li> <li>- inlet and outlet shut-off damper control</li> <li>- minimum and maximum fan speed preselection</li> <li>- analogue input (0-10 V) for air quality sensor (CO<sub>2</sub>, RH)</li> <li>- outputs for controlling electrical preheater and heater (pulse switched 10 V) or water heater (controlled by 0-10 V signal)</li> <li>- outputs for controlling cooling (direct or water), eventually heat pump</li> </ul> <p><b>Controller CPM</b></p> <ul style="list-style-type: none"> <li>- fully graphic touchscreen</li> <li>- weekly program</li> <li>- „party" mode</li> <li>- „holiday" mode</li> <li>- filter change notice</li> <li>- automatic operation based on constant signal - e.g. constant pressure</li> </ul> <p><b>Controller CP 10 RA</b></p> <ul style="list-style-type: none"> <li>- rotatable controller</li> </ul>	<div style="text-align: center;">  <p><b>CPM controller</b> with touchscreen display</p> </div> <div style="text-align: center; margin-top: 20px;">  <p><b>CP 10 RA</b> with mechanical knob</p> </div>
<b>"aMotion" controls</b>	<p><b>Standard aMotion control functions</b></p> <p><b>Elementary aM-CE basic module</b></p> <ul style="list-style-type: none"> <li>- EC fans speed control (according to selected mode)</li> <li>- Automatic heat and cool recovery control (by-pass control)</li> <li>- Evaluates and prevents all emergency conditions according to the measured values</li> <li>- Possibility of setting basic and user scenes and weekly calendars to select modes, power, temperatures and other functions</li> <li>- Ethernet connection for communication over the Internet</li> <li>- Inputs for external signals - control e.g. from kitchens, toilets and similar</li> <li>- Possibility of connecting air quality sensors (e.g. CO<sub>2</sub> concentration or relative humidity) either by contact, 0-10V voltage, or via the bus.</li> <li>- Outputs for continuous control of electric preheater and heater (pulse switched 10 V)</li> <li>- Possibility of connecting up to two controllers of different types</li> <li>- Connection to supervisory control system via Modbus TCP protocol</li> </ul> <p><b>Legendary aM-CL advanced module (with all functions from Elementary aM-CE module and additional options below)</b></p> <ul style="list-style-type: none"> <li>- Control of systems with VAV boxes</li> <li>- Control of systems with heat sources (heat pumps, heat accumulators etc.)</li> <li>- Communication by BACnet protocol over the bus</li> <li>- Possibility of connecting more than two controllers</li> <li>- More than 4 external bus elements (controllers, CO<sub>2</sub> sensors, outdoor temperature sensors,...)</li> <li>- Multiple adjustable scenes (more than 10)</li> <li>- More than 2 user calendars</li> <li>- More than 4 users (excluding service access)</li> </ul> <p><b>Additional module aM-IO18</b></p> <ul style="list-style-type: none"> <li>- Inputs for 4 external signals - control from kitchens, toilets and similar</li> <li>- Hot water heater control (0-10 V)</li> <li>- Control of circulation modes</li> </ul> <p><b>Additional module aM-IO12</b></p> <ul style="list-style-type: none"> <li>- Control of cooling (direct and water) and heat pumps</li> <li>- Rotary regenerator</li> </ul> <p><b>Additional aM-XCF</b></p> <ul style="list-style-type: none"> <li>- Unit control based on flow measurement</li> </ul> <p><b>Additional RD-K module</b></p> <ul style="list-style-type: none"> <li>- Additional inputs and outputs significantly expanding the control system functionality</li> </ul> <p><b>BACnet / KNX converter</b></p> <ul style="list-style-type: none"> <li>- Connection to the superior system via BACnet or KNX protocol</li> </ul>	<p><b>aTouch (touchscreen)</b></p> <div style="text-align: center;">  </div> <p><b>aDot (touchscreen)</b></p> <div style="text-align: center;">  </div> <p><b>aSpace (internet interface)</b></p> <div style="text-align: center;">  </div>